

## Front Terminal AGM Telecom Battery

## FB12-200B

CSBattery FB12 Series is specially designed for telecom use with 8-10 years design life in float service. By adopting a new AGM separator and centralized venting system, the battery can be installed in any position while maintaining high reliability. The dimensions of the FT series are designed for 19" and 23" cabinet installation. It is suitable for telecom EPS, applications.

12V  
200Ah

GEL  
Technology

Telecom  
Battery



### COMPLIED STANDARDS

IEC 60896-21/22    JIS C8704  
YD/T799            BS6290 part4  
GB/T 19638        CE

### Applications


- Telecom Control Equipment
- UPS systems, Inverter
- Power Equipment
- Solar & Wind
- Emergency Power Systems

### General Features

- ✓ Advanced AGM technology, and Maintenance-free operation;
- ✓ Front access terminal with standard width for 19" and 23" ETSI racks;
- ✓ Fire resistance ABS container;
- ✓ Long float service life 10years;
- ✓ Low self discharge <3%.

### Dimensions & Weight

Length(mm)	560±1
Width(mm)	125±1
Height(mm)	316±1
Total Height(mm)	316±1
Weight(kg)	57.0±3%

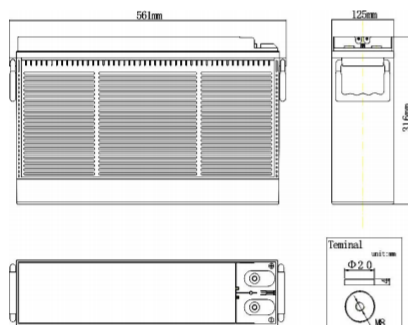

### Technical Specifications

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		10 Years
Nominal Capacity @25°C(10 hour rate@20.0A,10.8V)		200Ah
Capacity @25°C	20hour rate (10.6A,10.8V)	212Ah
	5hourrate(35.2A,10.5V)	176Ah
	1hourrate(127.6A,9.6V)	127.6Ah
Internal Resistance	Full Charged Battery@25°C	≤3.2mΩ
Ambient Temperature	Discharge	-15°C~45°C
	Charge	-15°C~45°C
	Storage	-15°C~45°C
Max.Discharge Current@25°C		2000A(5s)
Capacity affected by Temperature (10 hour)	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 50A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 50A Voltage 14.4-14.9V

### Battery Discharge Table

#### Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	465.0	361.0	216.6	161.0	127.6	75.0	55.2	37.2	25.4	21.0	11.1
1.65V	430.2	341.0	209.4	154.8	123.8	72.6	53.4	36.6	25.2	20.6	11.0
1.70V	399.0	320.2	203.6	149.2	119.0	70.6	52.0	35.8	24.8	20.4	10.9
1.75V	372.6	300.0	193.0	142.6	114.2	68.8	50.8	35.2	24.4	20.2	10.8
1.80V	335.2	281.4	186.2	137.4	110.2	66.2	49.2	34.4	24.0	20.0	10.6

#### Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	836.4	690.2	422.2	305.8	244.8	142.2	105.4	71.8	49.6	41.0	21.4
1.65V	782.8	660.4	403.8	295.4	238.2	138.4	102.6	70.6	49.2	40.6	21.2
1.70V	733.0	615.4	387.2	286.0	230.0	135.2	100.2	69.6	48.6	40.2	21.0
1.75V	689.8	577.4	368.6	274.6	221.6	132.0	98.2	68.6	48.0	39.8	20.8
1.80V	624.4	542.0	353.6	265.4	214.4	127.6	95.4	67.2	47.4	39.6	20.6

**Note:** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

### Performance Characteristics

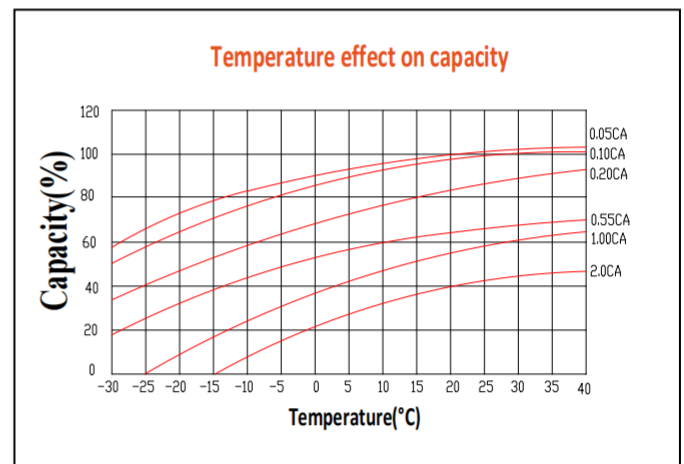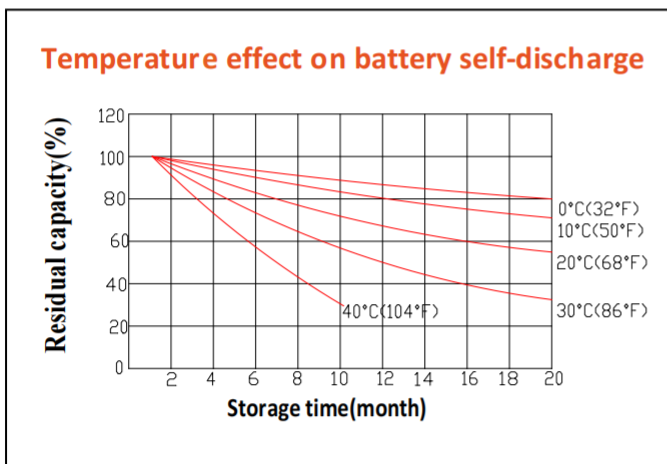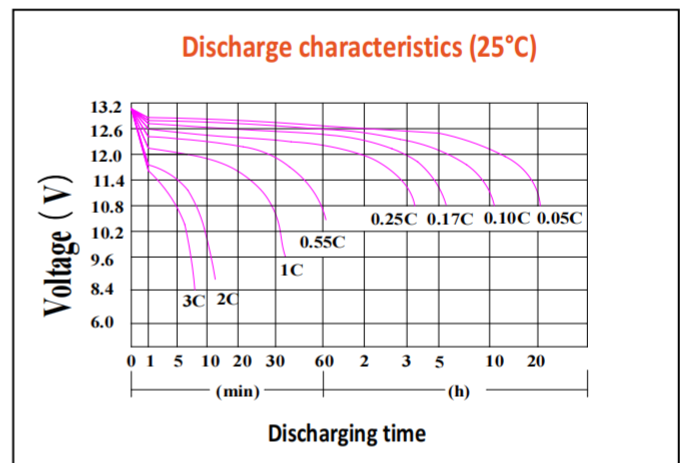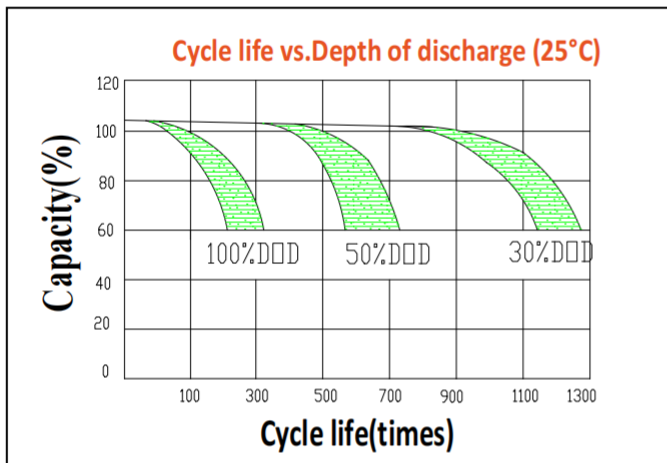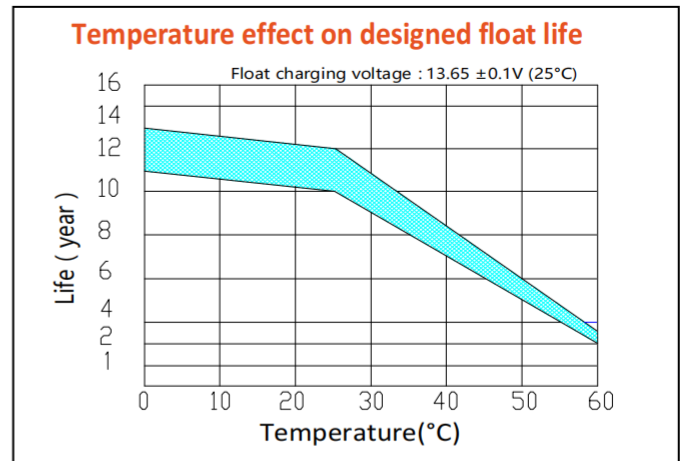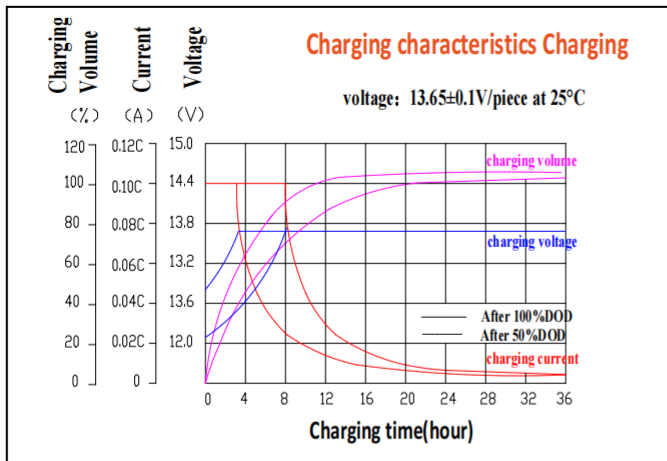

### Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistance ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	Female Copper Insert M6(torque :3~4N.m)	Advanced AGM separator for high pressure cell design	Dilute high purity sulfuric acid	Two layers epoxy resin seal

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.

Tel: +86-755-29123661 Email: Sales@CSBattery.cn, Support@CSBattery.cn

Website: [www.CSBattery.cn](http://www.CSBattery.cn)