

Front Terminal GEL Telecom Battery

FB12-200AG

CSBattery FB12G series front access telecom gel battery is upgrade from FB12 agm series especially for tele-communication applications. The FB12 GEL type front terminal battery comes with longer lasting design life and front access connections for fast, easy installation and maintenance, and is ideally suitable for telecom outdoor equipment, renewable energy systems and other severe environments.

12V
200Ah

GEL
Technology

Telecom
Battery



COMPLIED STANDARDS

IEC 60896-21/22 JIS C8704
YD/T1360 BS6290 part4
GB/T 19638 CE

Applications


- Telecom Control Equipment
- UPS systems, Inverter
- Power Equipment
- Solar & Wind
- Emergency Power Systems

General Features

- ✓ Advanced nano gel electrolyte and longer floating service life over 12years;
- ✓ Front access terminal with standard width for 19" and 23" ETSI racks;
- ✓ High rate discharge performance;
- ✓ Low self discharge <3%.

Dimensions & Weight

Length(mm)	560±1
Width(mm)	125±1
Height(mm)	316±1
Total Height(mm)	316±1
Weight(kg)	58.5±3%

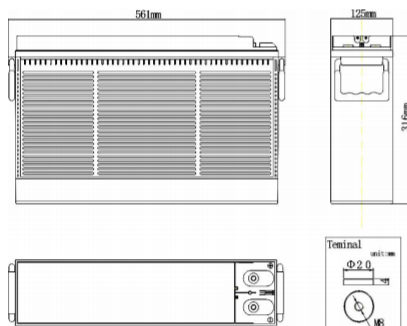

Technical Specifications

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		10 Years
Nominal Capacity @25°C (10 hour rate@20.0A,10.8V)		200Ah
Capacity @25°C	20hour rate (10.6A,10.8V)	212Ah
	5hourrate(35.2A,10.5V)	176Ah
	1hourrate(127.6A,9.6V)	127.6Ah
Internal Resistance	Full Charged Battery@25°C	≤3.2mΩ
Ambient Temperature	Discharge	-15°C~45°C
	Charge	-15°C~45°C
	Storage	-15°C~45°C
Max.Discharge Current@25°C		2000A(5s)
Capacity affected by Temperature (10 hour)	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 50A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 50A Voltage 14.4-14.9V

Battery Discharge Table

Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	465.0	361.0	216.6	161.0	127.6	75.0	55.2	37.2	25.4	21.0	11.1
1.65V	430.2	341.0	209.4	154.8	123.8	72.6	53.4	36.6	25.2	20.6	11.0
1.70V	399.0	320.2	203.6	149.2	119.0	70.6	52.0	35.8	24.8	20.4	10.9
1.75V	372.6	300.0	193.0	142.6	114.2	68.8	50.8	35.2	24.4	20.2	10.8
1.80V	335.2	281.4	186.2	137.4	110.2	66.2	49.2	34.4	24.0	20.0	10.6

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	836.4	690.2	422.2	305.8	244.8	142.2	105.4	71.8	49.6	41.0	21.4
1.65V	782.8	660.4	403.8	295.4	238.2	138.4	102.6	70.6	49.2	40.6	21.2
1.70V	733.0	615.4	387.2	286.0	230.0	135.2	100.2	69.6	48.6	40.2	21.0
1.75V	689.8	577.4	368.6	274.6	221.6	132.0	98.2	68.6	48.0	39.8	20.8
1.80V	624.4	542.0	353.6	265.4	214.4	127.6	95.4	67.2	47.4	39.6	20.6

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

Performance Characteristics

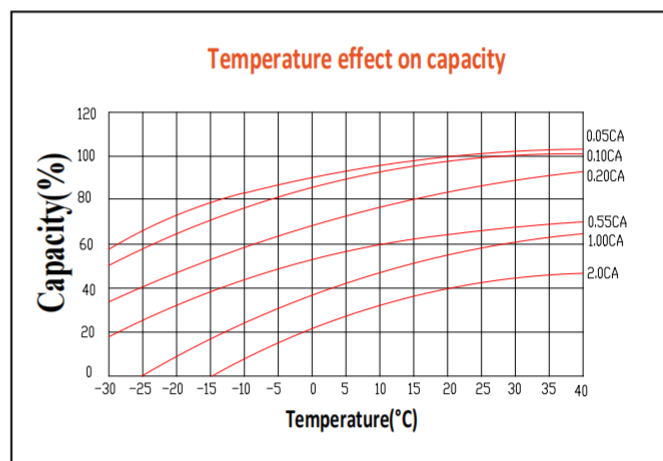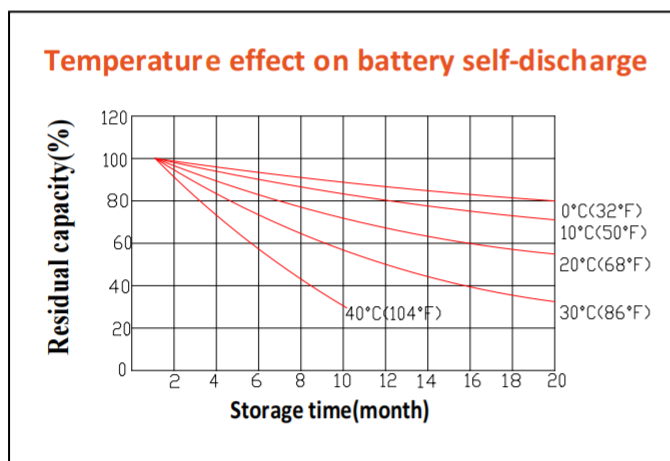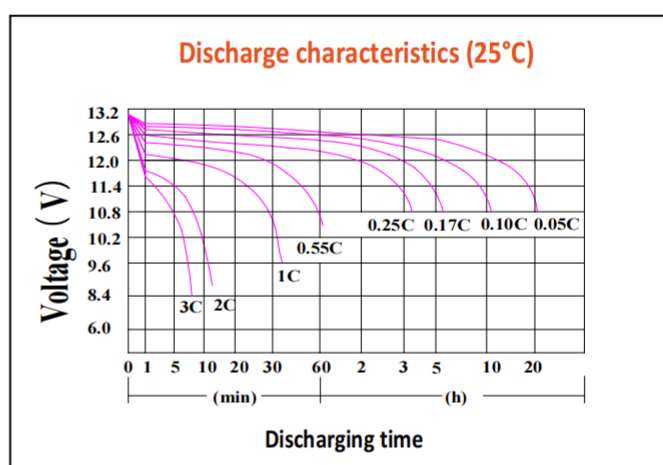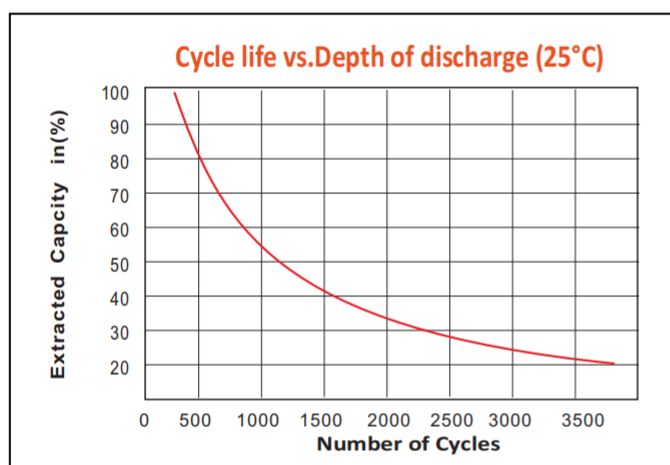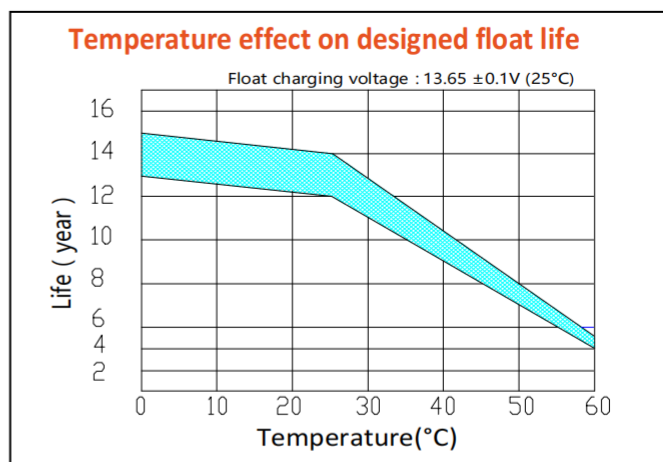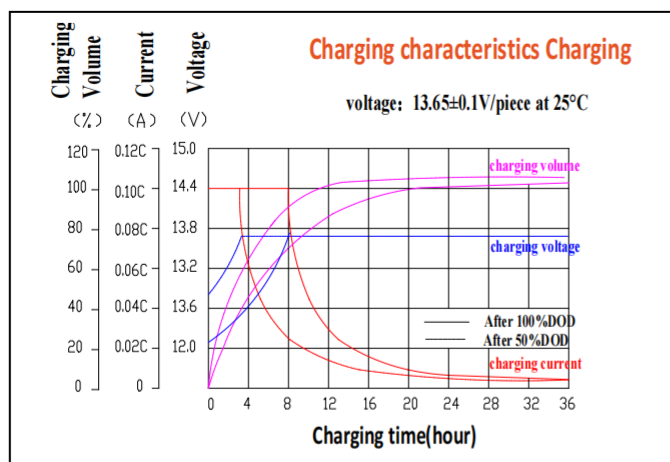

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistance ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	Female Copper Insert M6 (torque: 3~4N.m)	Advanced AGM separator for high pressure cell design	Silicon Gel import from Germany Evonik	Two layers epoxy resin seal