

Solar Battery SX2-300 2V 300Ah



SX series designed for true-deep cycle solar applications, with features like thick, pure virgin lead plates (99.996%), heavy-duty over-the-partition welds, super-C additive and a proprietary gel formulation designed for years of cycling long service life. SX is well-suited to all deep-cycle off-grid solar power system, from commercial to personal, solar sites.

SX can provide the best and reliable service under extreme conditions such as high temperature and frequent power outages for Solar project .

SX is the highly reliable, safe, and maintenance-free option.

Long Life

GEL Technology

Deep Cycle



COMPLIED STANDARDS
 IEC 60896-21/22 JIS C8704
 IEC61427 BS6290 part4
 GB/T 19638 CE/ISO




General Features

- Able to operate at 40-60°C
- DOD 50% 1500 times Cycles
- Integrated design to ensure the best Uniformity and reliability
- Long life and high stability under high temp. environment (no air-con needed)
- Use super-C additives: Deep discharge recovery capability

Dimensions & Weight

Length(mm/inch)	173/6.81
Width(mm/inch)	150/5.9
Height(mm/inch)	330/13
Total Height(mm/inch)	366/14.4
Weight(kg/lbs)	19/42

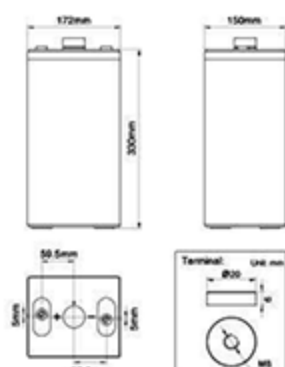

Technical Specifications

Nominal Voltage		2V(Single Cell)
Design Floating Life @25°C		15 Years
Nominal Capacity @25°C (10 hour rate@30.0A,1.8V)		300Ah
Capacity @25°C	20hour rate (15.9A,1.8V)	318Ah
	5 hour rate (53A,1.75V)	265Ah
	1 hour rate (182A,1.6V)	182Ah
Internal Resistance	Full Charged Battery@25°C	≤0.45mΩ
Ambient Temperature	Discharge	-20°C~60°C
	Charge	-10°C~60°C
	Storage	-20°C~60°C
Max.Discharge Current@25°C		600A(5s)
Capacity affected by Temperature (10 hour)	40°C	102%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 45A Voltage 2.23-2.27V
	Cycle Use	Initial Charging Current Less than 45A Voltage 2.33-2.37V

Battery Discharge Table

Discharge Constant Current per Cell (Amperes at 25° C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	838	541	449	297	221	182	116	83	56	37	33.0	17.5
1.65V	823	531	441	292	217	178	113	81	55	36	32.4	17.2
1.70V	808	522	432	286	213	175	111	80	54	36	31.8	16.9
1.75V	792	512	424	281	209	172	109	78	53	35	31.2	16.5
1.80V	762	492	408	270	201	165	105	75	51	34	30.0	15.9

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1614	1042	864	572	426	349	222	159	108	71	63.5	33.7
1.65V	1584	1023	848	561	418	343	218	156	106	70	62.4	33.1
1.70V	1555	1004	833	551	410	337	214	153	104	69	61.2	32.4
1.75V	1526	985	817	541	402	330	210	150	102	67	60.1	31.8
1.80V	1467	947	785	520	387	318	202	144	98	65	57.8	30.6

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact CSBattery for the latest information.







Durable Battery Choose CSBattery

Copyright© 2016 CSBattery Energy Co., Limited

Solar Battery SX2-300 2V 300Ah



Performance Characteristics

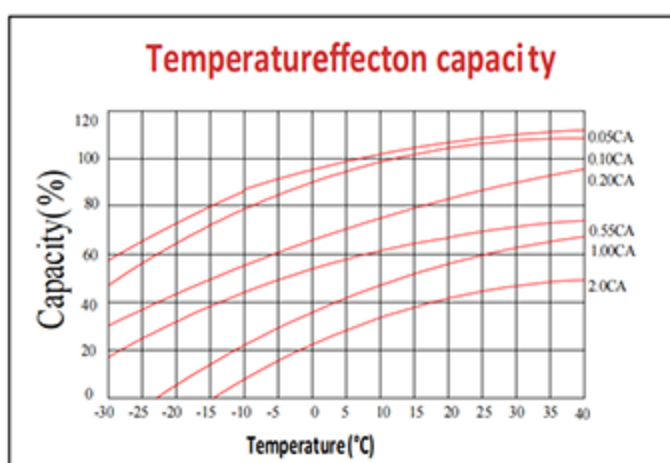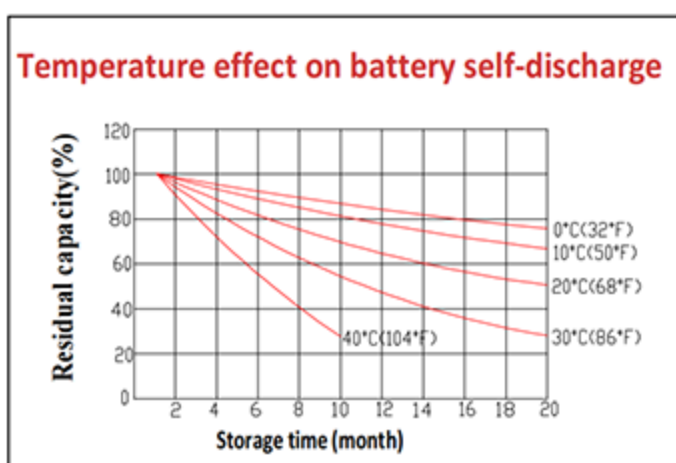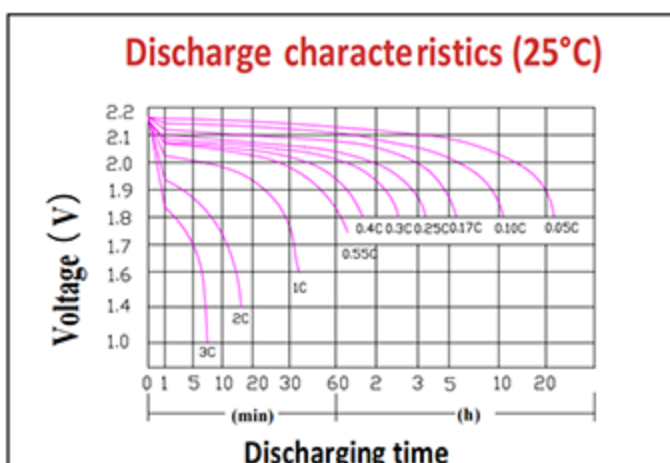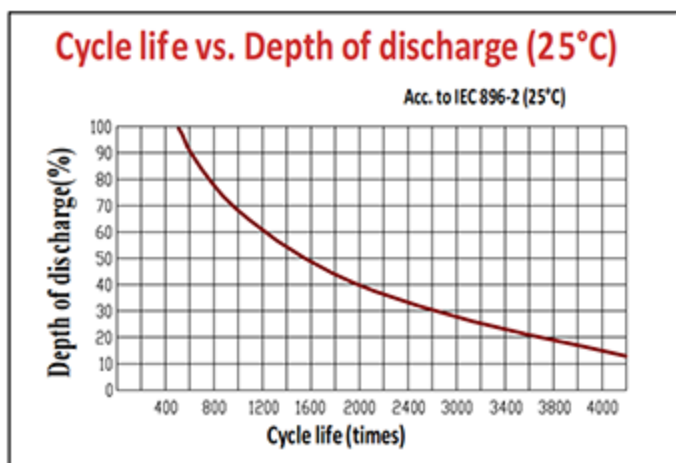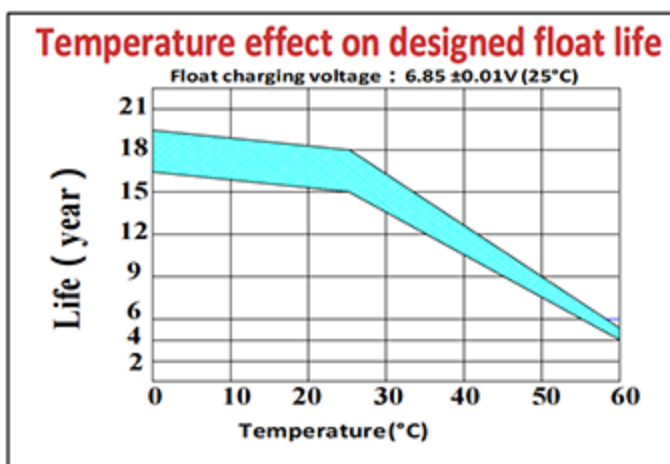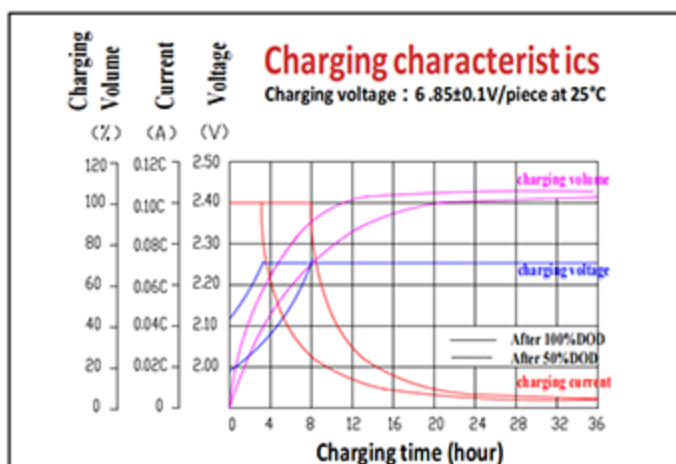

Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve
Features	Thick high Sn low Ca grid with Special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistant e ABS (UL94-V0optional)	Flame Si-Rubber and aging resistance
Component	Terminal	Separator	Electrolyte	Pillar seal
Features	Female Copper Insert	Advanced PVC /AGM separator for high pressure cell design	German Evonik Silicon GEL	Two layers epoxy resin seal

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.
 Tel: +86-755-29123661 Email: Sales@CSBattery.cn , Support@CSBattery.cn
 Website: www.CSBattery.cn

Durable Battery Choose CSBattery

Copyright© 2016 CSBattery Energy Co., Limited