

Deep Cycle Long Life GEL Battery

DC2-400G

DC2 GEL series uses the newly developed nano gel electrolyte with super-C additive plus heavy duty plates design inside. The HTB series has a long service life and can provide optimum and reliable service under extreme condition such as high temperature and frequent power failure, This series is highly suited for tropical area in outdoor applications such as Telecom BTS stations and Off-grid PV system.

2V
400Ah

GEL
Technology

Deep
Cycle



COMPLIED STANDARDS



Applications


- BTS Stations
- Solar & Wind energy system
- UPS system
- Telecom systems
- Wheel chair, Golf Car

General Features

- ✓ Able to operate at 40-60°C
- ✓ DOD 50% 1500 times Cycles
- ✓ Integrated design to ensure the best Uniformity and reliability
- ✓ Long life and high stability under high temp. environment (no air-con needed)
- ✓ Use super-C additives: Deep discharge recovery capability

Dimensions & Weight

Length(mm/inch)	211/8.31
Width(mm/inch)	175/6.89
Height(mm/inch)	330/13
Total Height(mm/inch)	366/14.4
Weight(kg/lbs)	26.5/58.5

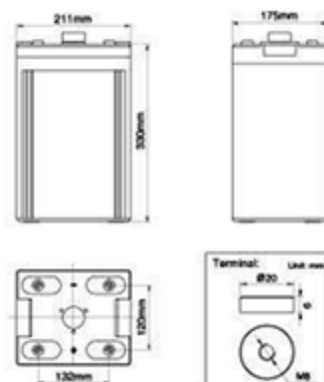

Technical Specifications

Nominal Voltage		2V(Single Cell)
Design Floating Life @25°C		15 Years
Nominal Capacity @25°C (10 hour rate@40.0A,1.8V)		400Ah
Capacity @25°C	20hour rate (21.2A,1.8V)	424Ah
	5 hour rate (71A,1.75V)	355Ah
	1 hour rate (242A,1.6V)	242Ah
Internal Resistance	Full Charged Battery@25°C	≤0.39mΩ
Ambient Temperature	Discharge	-20°C~60°C
	Charge	-10°C~60°C
	Storage	-20°C~60°C
Max.Discharge Current@25°C		800A(5s)
Capacity affected by Temperature (10 hour)	40°C	102%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 60A Voltage 2.23-2.27V
	Cycle Use	Initial Charging Current Less than 60A Voltage 2.33-2.37V

Battery Discharge Table

Discharge Constant Current per Cell (Amperes at 25° C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1118	722	598	396	295	242	154	110	75	49	44.0	23.3
1.65V	1097	708	588	389	289	238	151	108	73	48	43.2	22.9
1.70V	1077	695	577	382	284	233	148	106	72	47	42.4	22.5
1.75V	1057	682	566	374	279	229	146	104	71	47	41.6	22.0
1.80V	1016	656	544	360	268	220	140	100	68	45	40.0	21.2

Discharge Constant Power per Cell (Watts at 25° C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	2151	1389	1152	762	567	466	296	212	144	95	84.7	44.9
1.65V	2112	1364	1131	748	557	457	291	208	141	93	83.2	44.1
1.70V	2073	1339	1110	735	547	449	286	204	139	91	81.6	43.3
1.75V	2034	1313	1089	721	537	440	280	200	136	90	80.1	42.4
1.80V	1956	1263	1047	693	516	424	270	193	131	86	77.0	40.8







Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact CSBattery for the latest information.

Copyright© 2016 CSBattery Energy Co., Limited

Deep Cycle Long Life GEL Battery

DC2-400G

Performance Characteristics

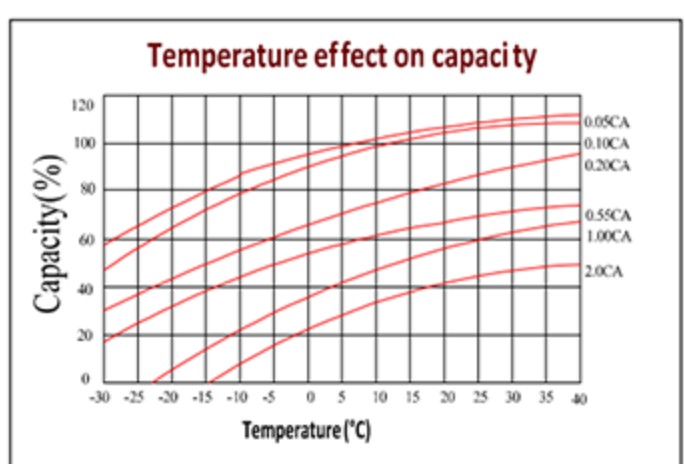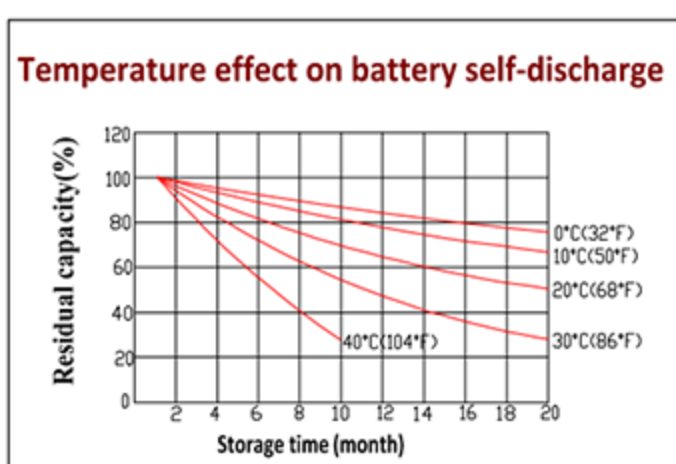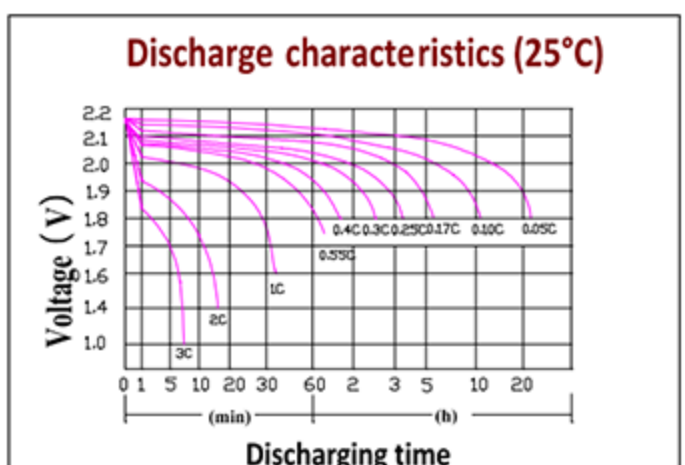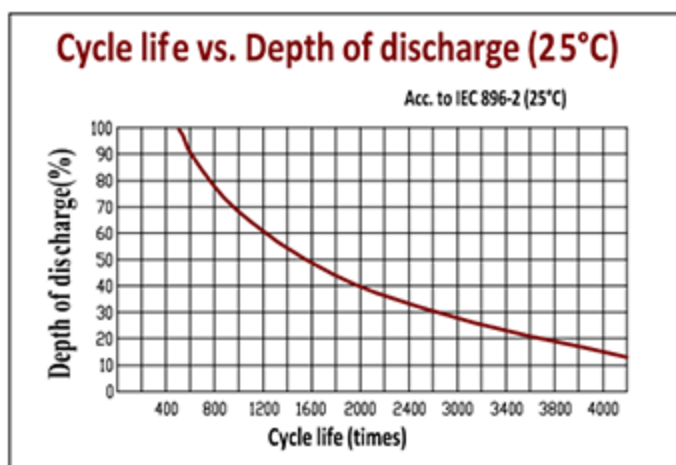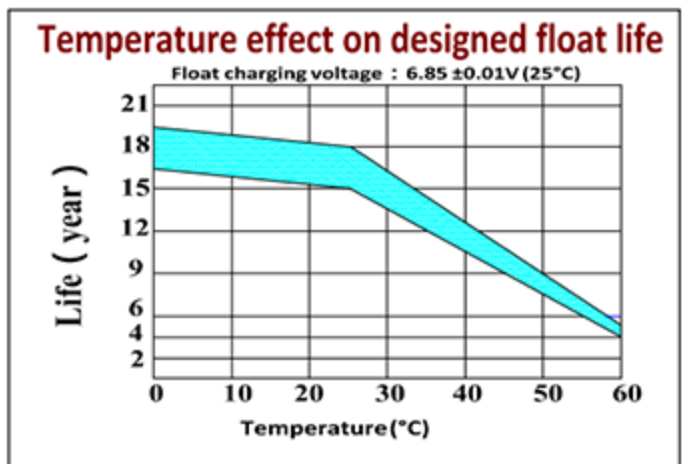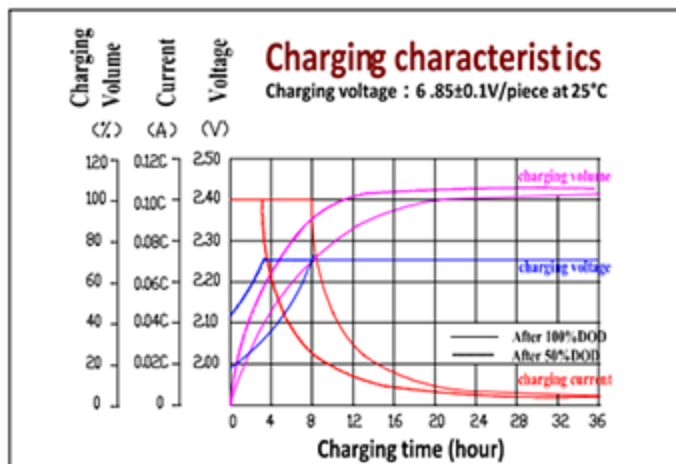

Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistant e ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	Female Copper Insert M8	Advanced PVC /AGM separator for high pressure cell design	Silicon Gel	Two layers epoxy resin seal

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.

Tel: +86-755-29123661 Email: Sales@CSBattery.cn ,Support@CSBattery.cn

Website: www.CSBattery.cn

Copyright© 2016 CSBattery Energy Co., Limited