

Deep Cycle Long Life AGM Battery

DC2-1500

CSBattery DC series deep cycle long life VRLA AGM battery uses a different chemistry additives in the positive plates and special AGM separators, The DC series features 70% higher cyclic life with 15 years of float life when compared to the standard Duration range. This series is highly suited for very unreliable power applications requiring the batteries to provide extra cyclic life performance such as PV system applications, small RE systems and electric vehicles.

2V 1500Ah **AGM Technology** **Deep Cycle**



COMPLIED STANDARDS



Applications


- Solar Systems
- Wheel chair, Golf Cart
- Telecom systems
- Cable TV Systems
- Emergency Power System

General Features

- Thicker plate with high Tin low Calcium alloy
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density
- Longer Service Life, in both Float or Cyclic

Dimensions & Weight

Length(mm/inch)	401/15.8
Width(mm/inch)	351/13.8
Height(mm/inch)	342/13.5
Total Height(mm/inch)	378/14.9
Weight(kg/lbs)(±3%)	96.5/212.8

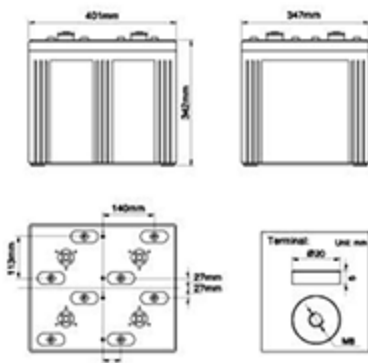

Technical Specifications

Nominal Voltage		2V(1 cell per unit)
Design Floating Life @25°C		15 Years
Nominal Capacity @25°C(10 hour rate@150A,1.8V)		1500Ah
Capacity @25°C	20hour rate (79.5A,1.8V)	1590Ah
	5 hour rate (265A, 1.75V)	1325Ah
	1 hour rate (908A, 1.6V)	908Ah
Internal Resistance	Full Charged Battery@25°C	≤0.13mΩ
Ambient Temperature	Discharge	-15°C~45°C
	Charge	-15°C~45°C
	Storage	-15°C~45°C
Max.Discharge Current@25°C		3000A(5s)
Capacity affected by Temperature (10 hour)	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 225A Voltage 2.23-2.27V
	Cycle Use	Initial Charging Current Less than 225A Voltage 2.33-2.37V

Battery Discharge Table

Discharge Constant Current per Cell (Amperes at 25° C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	2244	1485	1106	908	578	413	281	185	165.0	87.5
1.65V	2203	1458	1085	891	567	405	275	181	162.0	85.9
1.70V	2162	1431	1065	875	557	398	270	178	159.0	84.3
1.75V	2122	1404	1045	858	546	390	265	175	156.0	82.7
1.80V	2040	1350	1005	825	525	375	255	168	150.0	79.5

Discharge Constant Power per Cell (Watts at 25° C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	4320	2859	2128	1747	1112	794	540	356	317.6	168.3
1.65V	4241	2807	2089	1715	1091	780	530	349	311.9	165.3
1.70V	4163	2755	2051	1683	1071	765	520	343	306.1	162.2
1.75V	4084	2703	2012	1652	1051	751	511	336	300.3	159.2
1.80V	3927	2599	1935	1588	1011	722	491	323	288.8	153.0







Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact CSBattery for the latest information.

Copyright© 2016 CSBattery Energy Co., Limited

Deep Cycle Long Life AGM Battery

DC2-1500

Performance Characteristics

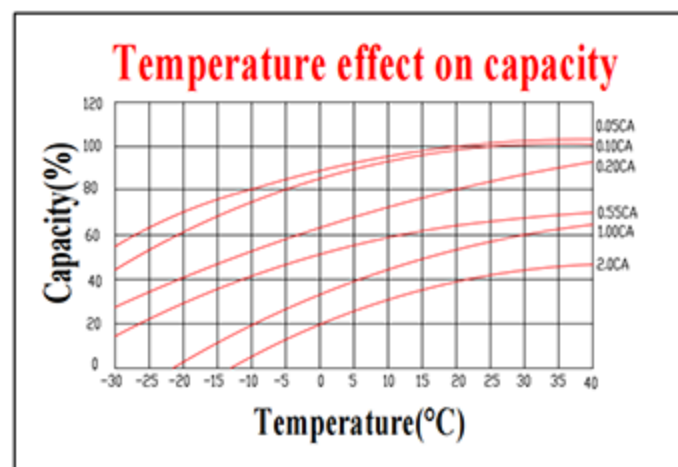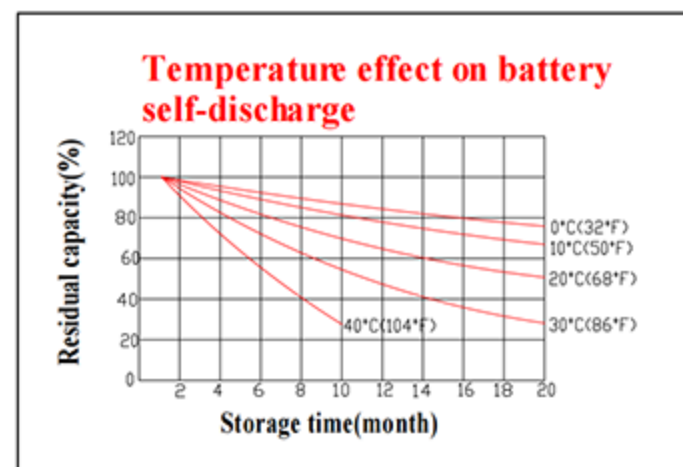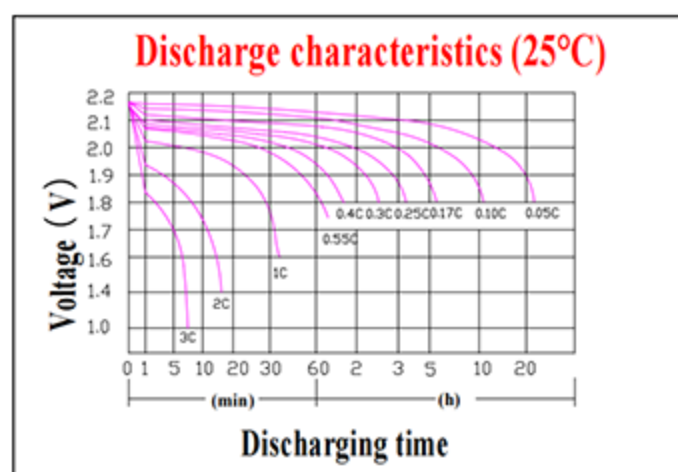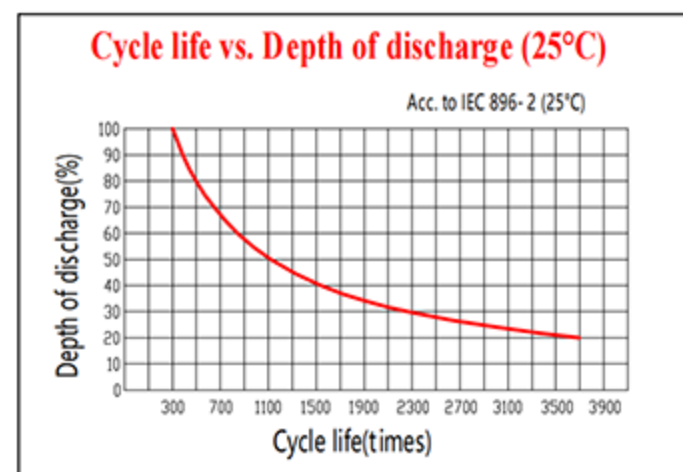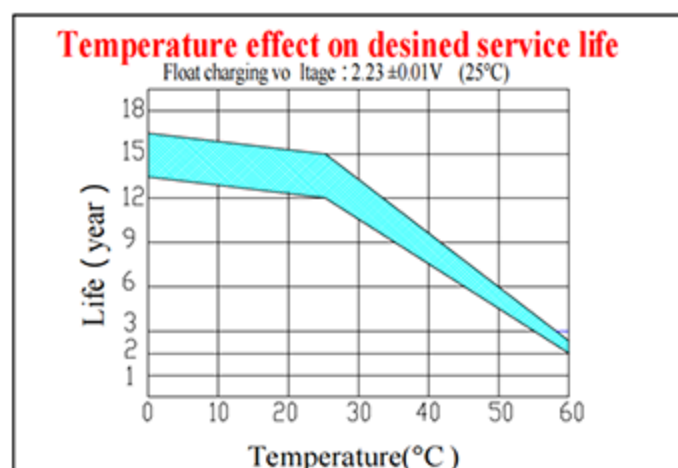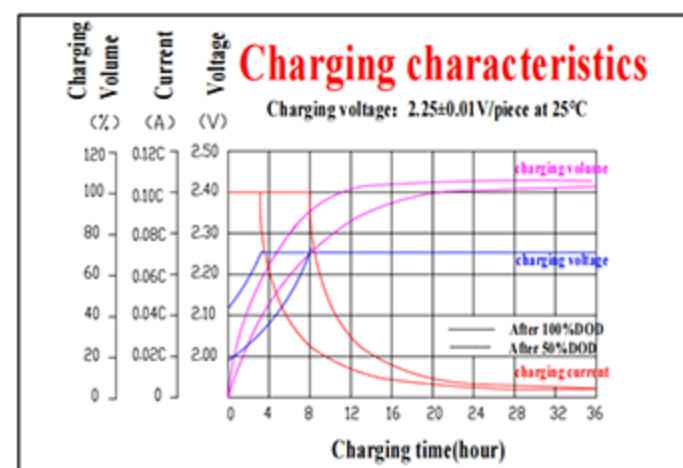

Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistance ABS (UL94-V0)	Flame Si-Rubber and aging resistance	Female Copper Insert M8	Advanced AGM separator for high pressure cell design	Dilute high purity sulfuric acid	Two layers epoxy resin seal

Copyright© 2016 CSBattery Energy Co., Limited