

LiFePO4 Power Battery LFP12V12 12.8V 12Ah



LiFePO4 Technology Brief Introduce

LiFePO4 technology surpasses lead acid technology in all areas: reliability, performance, security, cleanliness...

- Weight/power ratio = 70% lighter than lead acid batteries
- Battery life = lasts 4 to 5 times longer than conventional lead acid batteries
- Very low self-discharge rate
- Wide range of operating temperatures = from 20° C to 60° C
- Unlike lead acid batteries, incomplete charges have no impact on battery life
- Extra security = leak-proof, as the battery does not contain acid. LiFePO4 batteries can therefore be installed in any position without risk of leakage.

LiFePO4 technology eliminates the risk of explosion or combustion.

LiFePO4 batteries are equipped with protection against short circuit currents (BMS), which protects the battery from short circuits, overloads and deep discharge. The BMS also balances cells in order to guarantee longer battery life.

Long
Life

Lithium Iron
Phosphate


Deep
Cycle



Applications

- Electric Vehicles, Electric Mobility
- Solar/Wind Energy Storage System
- UPS, Backup Power
- Telecommunication
- Medical Equipment
- Lighting

Dimensions & Weight

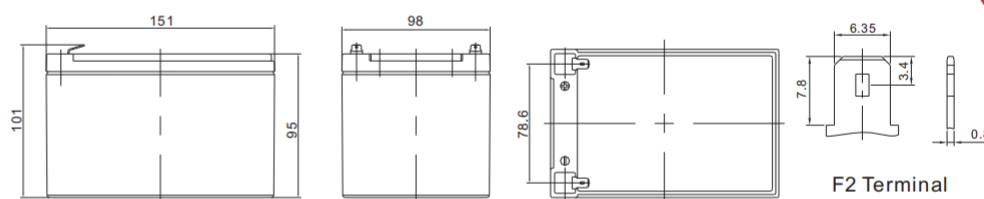

- Length: 151 ± 1mm Width: 98 ± 1mm Height: 95 ± 1mm Total Height: 101 ± 1mm
- Weight: 1.5 ± 0.1kgs

Technical Specifications

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	12Ah
	Energy	153.6Wh
	Terminal	M5
	Cycle Life	> 2000cycles @1C
	Months Self Discharge	< 3%
	Efficiency of Charge	100 % @0.2C
Standard Charge	Efficiency of Discharge	96 ~ 99% @0.5C
	Charge Voltage	14.6-15.2V
	Charge Mode	0.2C to 13.6V, then 13.6V, charge current to 0.02C(CC/CV)
	Charge Current	3.6A
	Max. Charge Current	12A
Standard Discharge	Charge Cut-off Voltage	14.6V ± 0.2
	Continuous Current	6A
	Max continuous discharge current	12A
Environmental	Discharge Cut-off Voltage	10V
	Charge Temperature	0 °C to 45 °C (32 F to 113 F) @60 ± 25 % Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140 F) @60 ± 25 % Relative Humidity
	Storage Temperature	0 °C to 40 °C (32 F to 104 F) @60 ± 25 % Relative Humidity
Mechanical	Water Dust Resistance	IP21
	Cell & Method	32650, 4S2P
	Plastic Case	ABS
	Dimensions (in./mm.)	151*98*95mm (Customized)
	Weight (lbs./kg.)	Approx: 1.5Kg (3.31bs)
	Gravimetric specific energy	103WH/KG
	Bluetooth (optional)	/
LCD display (optional)	/	


Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Short detection function
- Balance function

Performance Characteristics


Different Rate Discharge Curve (25°C)

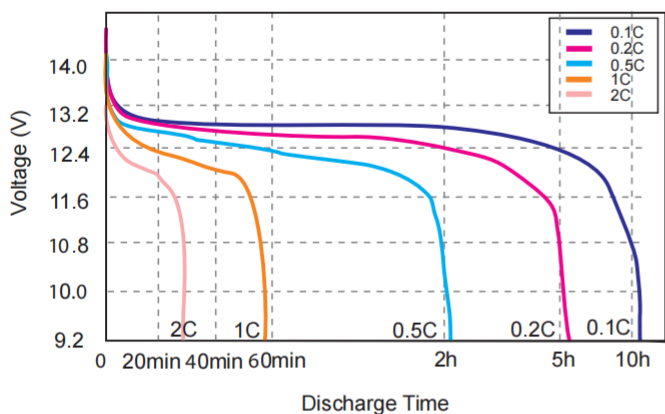


Different Temperature Discharge Curve At 0.5c

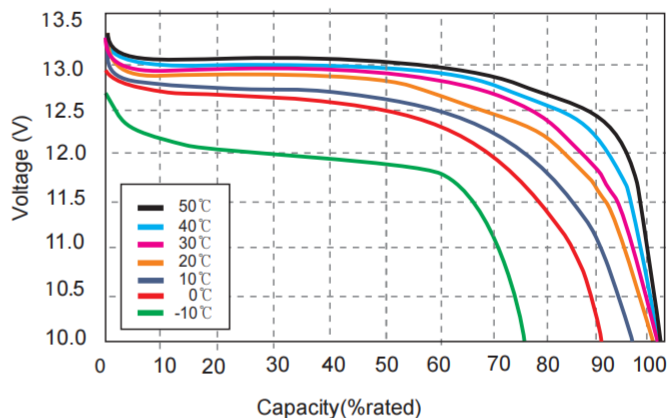


State Of Charge Curve At 0.5c (25°C)

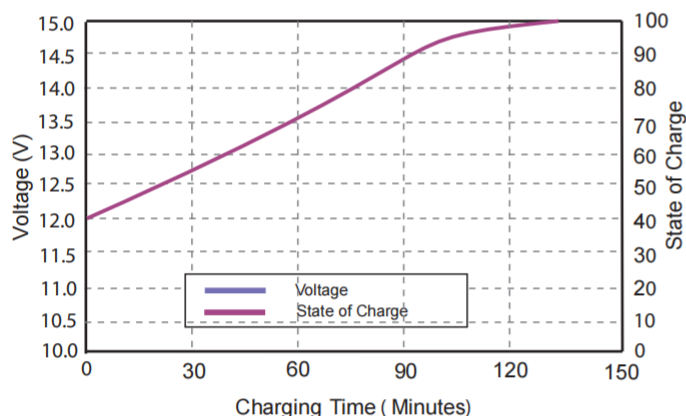


Charging Characteristics At 0.5c (25°C)

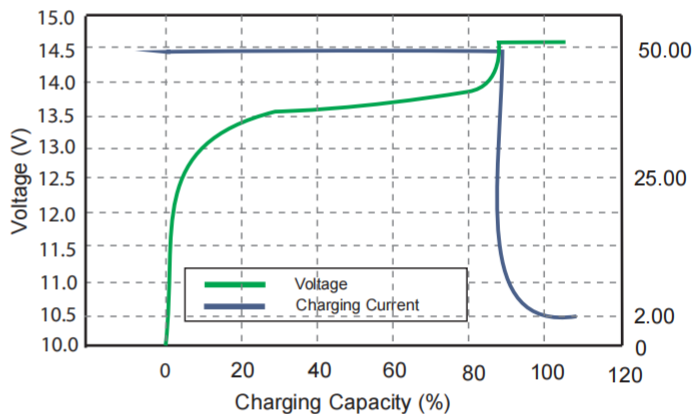

Cycle Life Curve At 1c According Dod

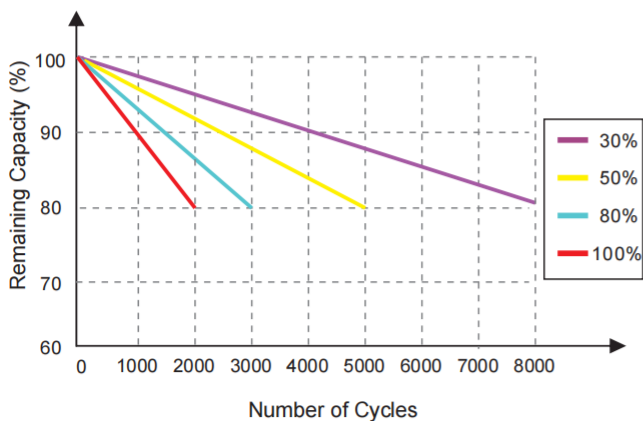

Self Discharge Characteristics Curve

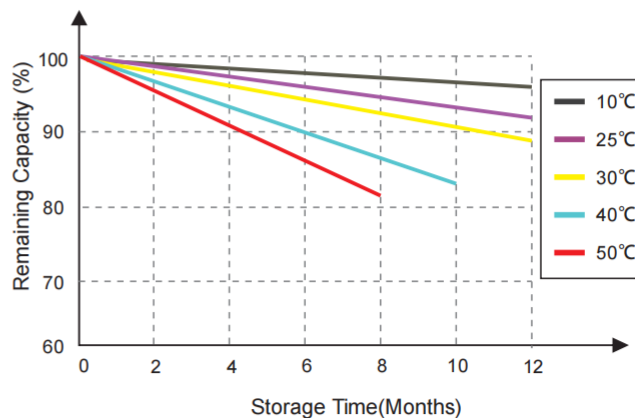

SAFETY WARNING: USE ONLY WITHIN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.
Tel: +86-755-29123661 Email: Sales@CSBattery.cn , Support@CSBattery.cn
Website: www.CSBattery.cn