

# LiFePO4 Power Battery LFP24V50 25.6V 50Ah

## LiFePO4 Technology Brief Introduce

LiFePO4 technology surpasses lead acid technology in all areas: reliability, performance, security, cleanliness...

- Weight/power ratio = 70% lighter than lead acid batteries
- Battery life = lasts 4 to 5 times longer than conventional lead acid batteries
- Very low self-discharge rate
- Wide range of operating temperatures = from 20° C to 60° C
- Unlike lead acid batteries, incomplete charges have no impact on battery life
- Extra security = leak-proof, as the battery does not contain acid. LiFePO4 batteries can therefore be installed in any position without risk of leakage.

LiFePO4 technology eliminates the risk of explosion or combustion.

LiFePO4 batteries are equipped with protection against short circuit currents (BMS), which protects the battery from short circuits, overloads and deep discharge. The BMS also balances cells in order to guarantee longer battery life.

Long Life

Lithium Iron Phosphate


Deep Cycle



## Applications

- Electric Vehicles, Electric Mobility
- Solar/Wind Energy Storage System
- UPS, Backup Power
- Telecommunication
- Medical Equipment
- Lighting

## Dimensions & Weight

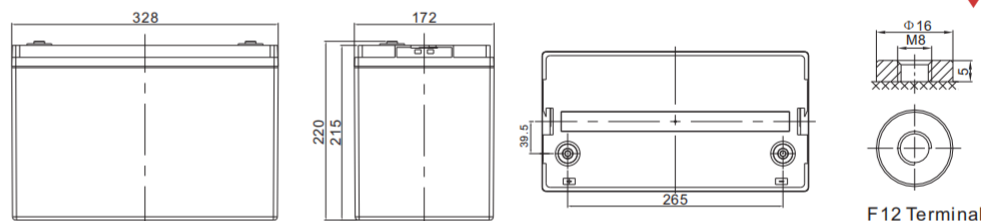

## Technical Specifications

- Length: 330 ±1mm Width: 172 ±1mm Height: 215 ±1mm Total Height: 220 ±1mm
- Weight: 11.5 ±0.1kgs

Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	50Ah
	Energy	1280Wh
	Terminal	M8
	Cycle Life	> 2000cycles @1C
	Months Self Discharge	< 3%
	Efficiency of Charge	100 % @0.2C
Standard Charge	Efficiency of Discharge	96 ~99% @0.5C
	Charge Voltage	29.2-30.4V
	Charge Mode	0.2C to 27.2V, then 27.2V, charge current to 0.02C(CC/CV)
	Charge Current	15A
Standard Discharge	Max. Charge Current	50A
	Charge Cut-off Voltage	29.2V ± 0.2
	Continuous Current	25A
Environmental	Max continuous discharge current	50A
	Discharge Cut-off Voltage	20V
	Charge Temperature	0 °C to 45 °C (32 F to 113 F) @60 ± 25 % Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140 F) @60 ± 25 % Relative Humidity
Mechanical	Storage Temperature	0 °C to 40 °C (32 F to 104 F) @60 ± 25 % Relative Humidity
	Water Dust Resistance	IP21
	Cell & Method	32650, 8S8P
	Plastic Case	ABS
	Dimensions (in./mm.)	330*172*215mm (Customized)
	Weight (lbs./kg.)	Approx: 12Kg (26.46lbs)
	Cooling Mode	Automatic cold and hot
Bluetooth (optional)	/	
LCD display (optional)	/	


**Note:** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

## BMS Specifications


- Overcharge detection function
- Over discharge detection function
- Over current detection function
- Temperature protection
- Short detection function
- Balance function

## Performance Characteristics


### Different Rate Discharge Curve (25°C)

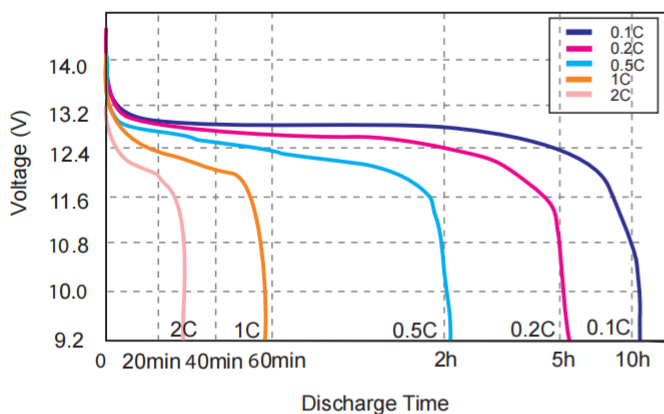


### Different Temperature Discharge Curve At 0.5c

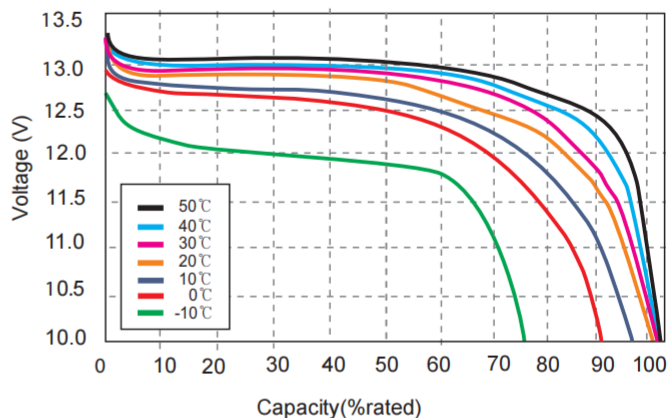


### State Of Charge Curve At 0.5c (25°C)

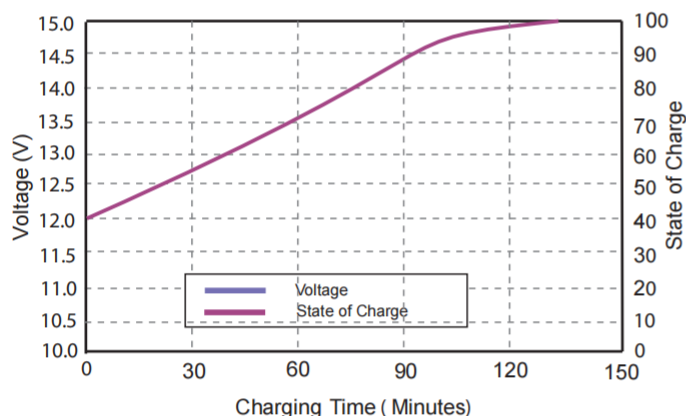


### Charging Characteristics At 0.5c (25°C)

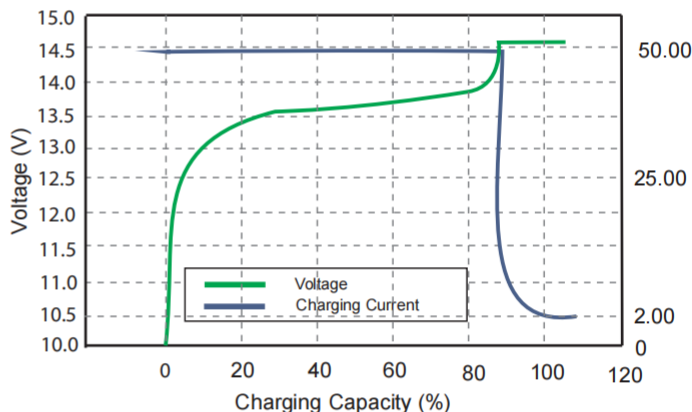

### Cycle Life Curve At 1c According Dod

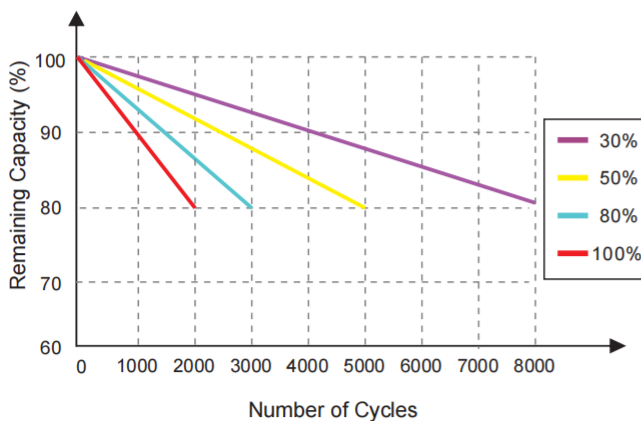

### Self Discharge Characteristics Curve

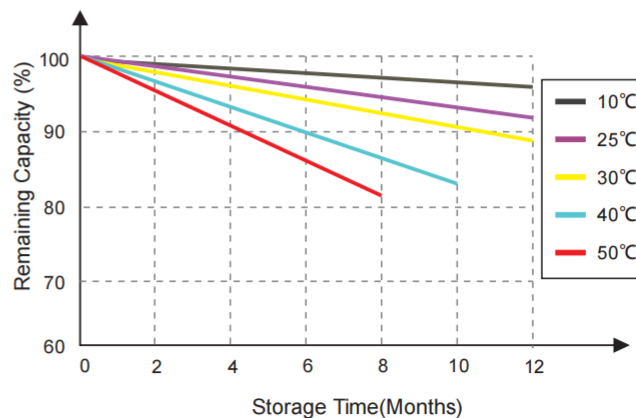

**SAFETY WARNING: USE ONLY WITHIN THE ALLOWED PARAMETERS.** Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. **DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.**

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.  
Tel: +86-755-29243661 Email: Sales@CSBattery.cn , Support@CSBattery.cn  
Website: www.CSBattery.cn