

Valve Regulated Long Life GEL Battery

GB12-65G

CSBattery GBG series pure GEL battery is with 12-15 years floating design life, it is ideal for standby or frequent cyclic discharge applications under extreme environments. By adopting thicker grids, high purity 99.997% lead and patented Silicon Gel electrolyte, GBG series offers excellent recovery performance after deep discharge under frequent cyclic discharge use, and can deliver 1200 cycles at 50% DOD even work in hot or cold area. Suitable for Solar, CATV, marine, RV and deep discharge UPS, communication, and tele communication, etc.

12V
65Ah

GEL
Technology

Long Life
Battery



Applications

- Telecom Control Equipment
- UPS systems, Inverter
- Power Equipment
- Solar & Wind
- Emergency Power Systems

General Features




- ✓ 30% more cyclic life through innovation at the PAM additives
- ✓ Long life expectancy of 15 years in floating condition
- ✓ Adopts quality silicon nano gel electrolyte
- ✓ Excellent deep discharge recovery capability
- ✓ Deep cycle performance: up to 1200 cycles@50%DOD

COMPLIED STANDARDS



Dimensions & Weight

Length(mm/inch)	350/13.78
Width(mm/inch)	167/6.58
Height(mm/inch)	178/7.01
Total Height(mm/inch)	178/7.01
Weight(kg/lbs)(±3%)	21/46.3

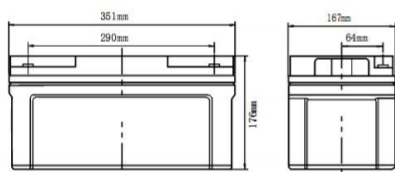

Technical Specifications

Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		12 Years
Nominal Capacity @25°C(10 hour rate@6.50A,10.8V)		65Ah
Capacity @25°C	20hour rate (3.61A,10.8V)	72.2Ah
	5 hour rate (11.9A,10.5V)	59.5Ah
	1 hour rate (43.2A,9.6V)	43.2Ah
Internal Resistance	Full Charged Battery@25°C	≤7.0mΩ
Ambient Temperature	Discharge	-20°C~60°C
	Charge	-10°C~60°C
	Storage	-20°C~60°C
Max.Discharge Current@25°C		390A(5s)
Capacity affected by Temperature (10 hour)	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 16.25A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 16.25A Voltage 14.4-14.9V

Battery Discharge Table

Discharge Constant Current per Cell (Amperes at 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	109.7	68.3	49.0	43.2	26.4	19.3	16.3	12.4	7.6	6.76	3.75
1.65V	105.2	66.5	47.7	42.1	25.9	18.9	15.9	12.2	7.5	6.70	3.72
1.70V	100.6	64.6	46.4	40.9	25.4	18.6	15.5	12.1	7.4	6.63	3.68
1.75V	96.0	62.8	45.1	39.8	24.8	18.1	15.1	11.9	7.4	6.57	3.64
1.80V	91.5	61.0	43.7	38.6	24.2	17.7	14.7	11.7	7.3	6.50	3.61

Discharge Constant Power per Cell (Watts at 25°C)







F.V/Time	15min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	204.7	127.4	91.4	80.6	49.2	35.9	29.6	23.1	14.1	12.6	7.0
1.65V	196.1	123.9	88.9	78.5	48.3	35.3	29.0	22.8	14.0	12.5	6.9
1.70V	187.6	120.5	86.5	76.3	47.4	34.6	28.5	22.5	13.8	12.4	6.9
1.75V	179.1	117.1	84.0	74.2	46.2	33.8	28.0	22.1	13.7	12.2	6.8
1.80V	170.6	113.7	81.6	72.0	45.1	33.0	27.4	21.8	13.6	12.1	6.7

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

Valve Regulated Long Life GEL Battery

GB12-65G

Performance Characteristics

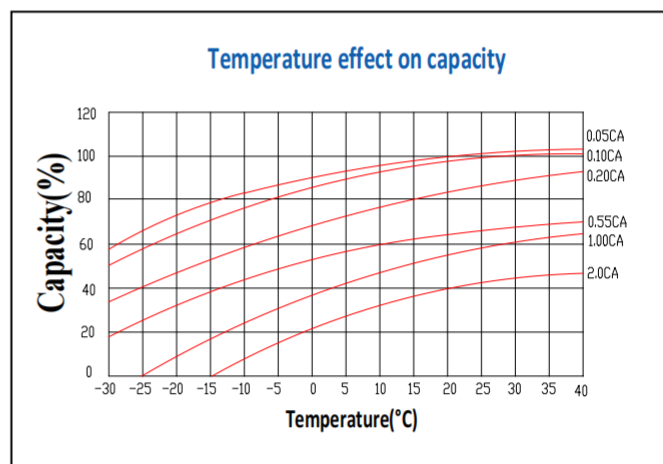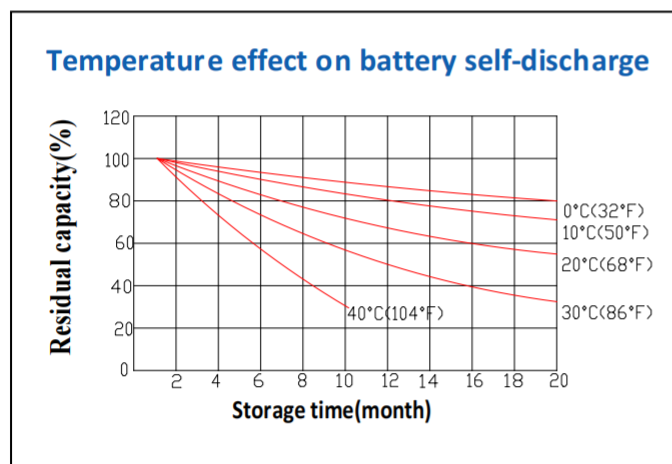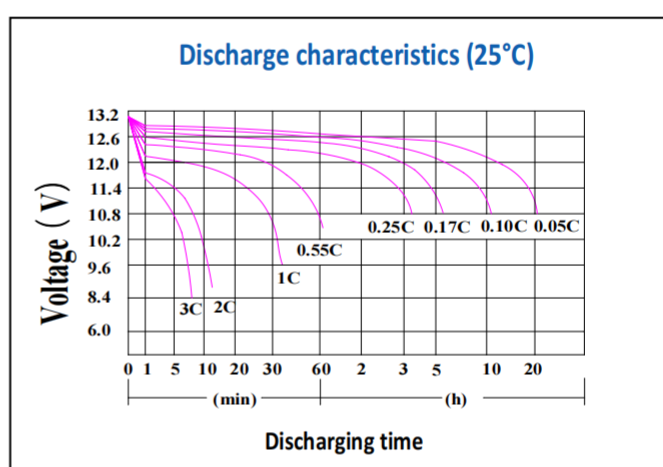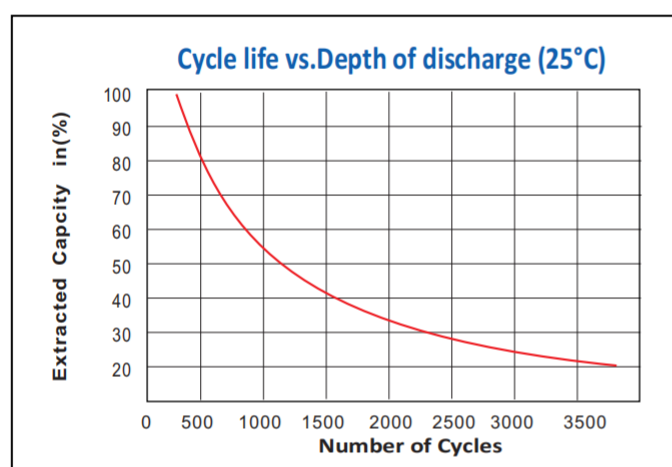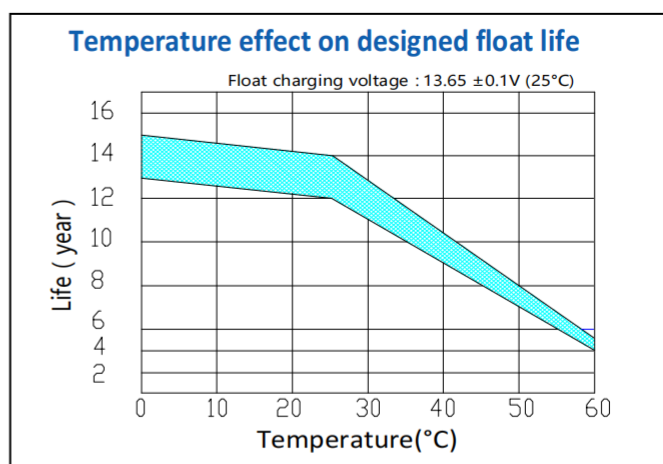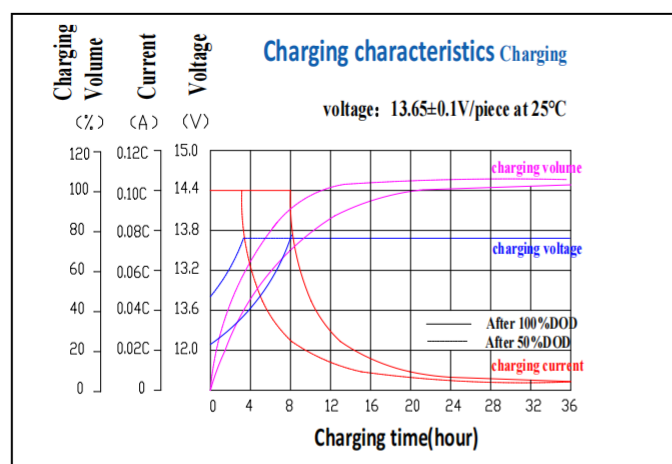

Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistance ABS (UL94-V0)	Flame Si-Rubber and aging resistance	Female Copper Insert M8	Advanced PVC /AGM separator for high pressure cell design	Silicon Gel	Two layers epoxy resin seal

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.

Tel: +86-755-29123661 Email: Sales@CSBattery.cn, Support@CSBattery.cn

Website: www.CSBattery.cn