

## Fast Charge Deep Cycle Lead-Carbon Battery

## HDC6-225

HDC series lead-carbon batteries use functional activated carbon and graphene as carbon materials, which are added to the negative plate of the battery to make lead carbon batteries have the advantages of both lead-acid batteries and super capacitors. It not only improves the ability of rapid charge and discharge, but also greatly prolongs the battery life. It is more suitable for the application of PSOC.

6V  
225Ah

Lead Carbon  
Technology

Deep  
Cycle



### COMPLIED STANDARDS

IEC 60869-21-22 JIS C8704 YD/T799  
BS6290 part4 GB/T 19638 UL 1989



### General Features

- ✓ Combine the characteristics of lead acid battery and super capacitor
- ✓ Long life cycle service design, excellent PSOC and cyclic performance
- ✓ High power, rapid charging and discharging
- ✓ Unique grid and lead pasting design
- ✓ Extreme temperature tolerance
- ✓ Able to operate at -30°C ~60°C
- ✓ Deep Discharge recovery capability

### Applications


- Home Energy storage system
- Smart Power grid system
- Solar & Wind Power system
- Wheel chair, Golf Car
- Telecom systems
- BTS Stations
- Micro-grid system

### Technical Specifications

Nominal Voltage		6V(3 cells per unit)
Design Floating Life @25°C		20 Years
Nominal Capacity @25°C(20 hour rate@11.25A,5.25V)		225.0Ah
Capacity @25°C	10 hour rate (20.88A,5.40V)	208.8Ah
	5 hour rate (38.70A,5.25V)	193.5Ah
	1 hour rate (135.4A,4.80V)	135.4Ah
Internal Resistance	Full Charged Battery@25°C	≤2.8mΩ
Ambient Temperature	Discharge	-30°C~60°C
	Charge	-30°C~60°C
	Storage	-30°C~60°C
Max. Discharge Current@25°C		2250A(5s)
Capacity affected by Temperature (10 hr Capacity )	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 56.3A Voltage 6.80-6.90V
	Cycle Use	Initial Charging Current Less than 56.3A Voltage 7.20-7.35V

### Dimensions & Weight

Length(mm)	243±1
Width(mm)	187±1
Height(mm)	275±1
Total Height(mm)	275±1
Weight(kg)	32.5±3%

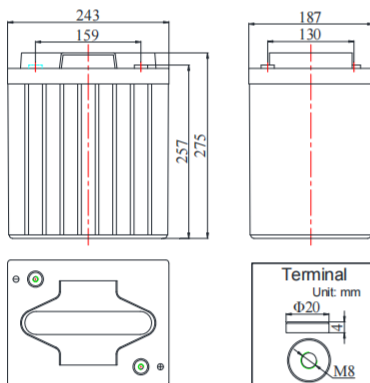

### Battery Discharge Table

Discharge Constant Current per Cell(Ampers at 25 °C)

F.V/Time	5min	10min	15min	20min	25min	30min	35min	40min	45min	60min	90min	2h	3h	4h	5h	6h	7h	8h	10h	12h	20h
1.60V	611.8	390.1	331.4	269.9	237.9	211.9	187.1	170.0	155.5	135.4	109.3	85.9	60.4	49.4	40.9	34.3	30.2	27.0	22.93	19.28	11.93
1.65V	600.7	382.9	325.5	265.5	233.8	208.1	183.5	166.9	152.7	132.7	107.1	84.2	59.2	48.4	40.2	33.6	29.7	26.5	22.49	18.93	11.70
1.67V	594.8	379.3	321.9	261.3	231.8	206.3	182.5	166.1	151.9	131.5	106.4	83.5	58.7	48.0	39.7	33.4	29.5	26.3	22.26	18.80	11.59
1.70V	582.7	372.3	315.7	256.6	227.4	202.1	179.5	163.2	149.3	128.8	104.2	82.8	58.2	47.5	39.4	33.1	29.2	26.0	21.80	18.47	11.50
1.75V	578.3	368.5	313.4	253.4	223.9	200.3	177.1	161.0	147.3	127.3	103.2	81.1	57.0	46.7	38.7	32.6	28.7	25.6	21.57	18.18	11.25
1.80V	560.1	356.6	302.6	247.7	217.2	193.9	171.9	156.3	142.9	123.4	100.1	77.9	54.8	44.6	37.2	31.4	27.5	24.6	20.88	17.58	10.91







Discharge Constant Power per Cell(Watts at 25 °C)

F.V/Time	5min	10min	15min	20min	25min	30min	35min	40min	45min	60min	90min	2h	3h	4h	5h	6h	7h	8h	10h	12h	20h
1.60V	1146.4	735.4	625.0	511.4	452.7	404.8	357.4	325.8	298.2	259.8	209.4	164.9	115.9	94.7	78.4	65.7	57.9	51.9	43.8	37.2	23.18
1.65V	1129.9	724.3	617.2	505.2	446.5	399.1	351.0	319.3	293.8	255.1	205.7	162.1	113.9	93.2	77.4	64.5	57.2	51.1	43.1	36.5	22.95
1.67V	1121.9	718.4	611.6	500.1	442.9	395.5	349.2	318.3	292.0	252.5	204.3	160.7	113.0	92.3	76.4	64.3	56.7	50.6	42.9	36.3	22.84
1.70V	1111.6	708.1	601.8	490.8	434.9	387.8	344.3	313.1	287.6	247.8	200.1	159.2	111.7	91.3	76.0	63.8	56.2	50.2	42.0	35.6	22.73
1.75V	1105.7	702.2	597.9	484.4	428.7	384.2	339.9	309.5	283.0	245.2	198.2	156.1	109.6	89.8	74.5	62.8	55.3	49.2	41.5	35.1	22.28
1.80V	1073.3	682.6	579.9	475.6	417.4	372.3	330.1	301.0	274.8	237.6	192.1	150.2	105.4	85.7	71.8	60.4	52.8	47.2	40.2	34.0	21.60

**Note:** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSBattery** for the latest information.

## Fast Charge Deep Cycle Lead-Carbon Battery HDC6-225

### Performance Characteristics

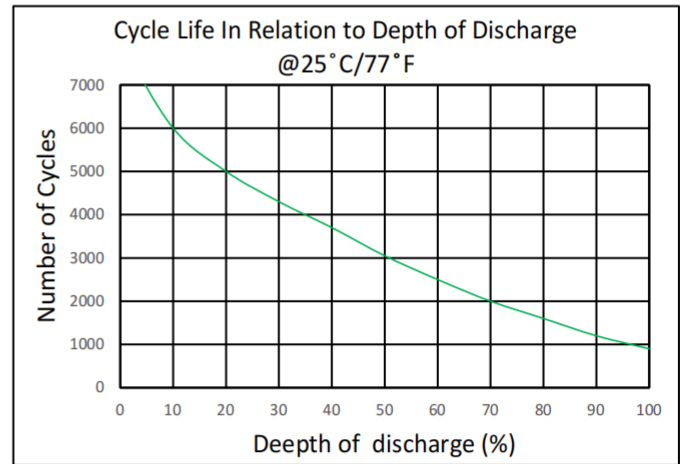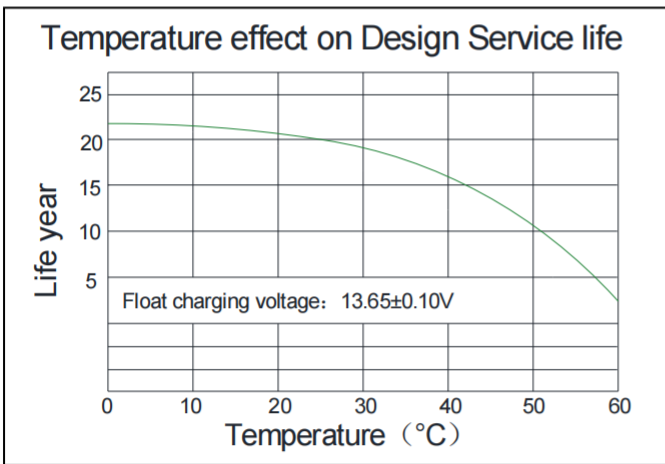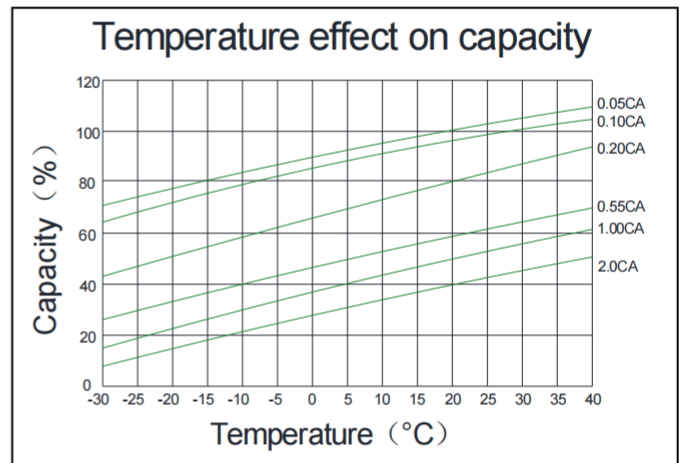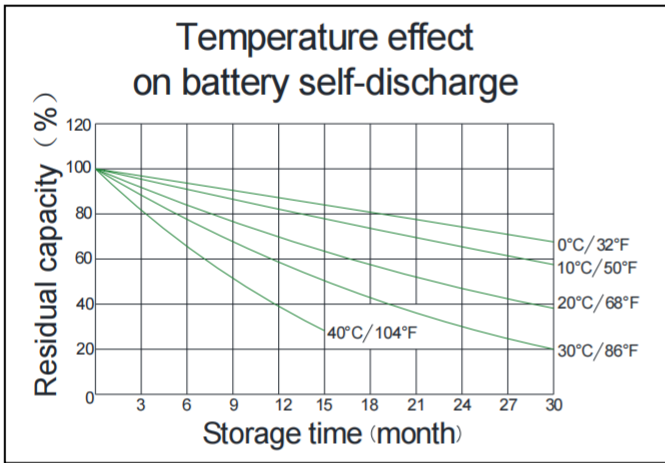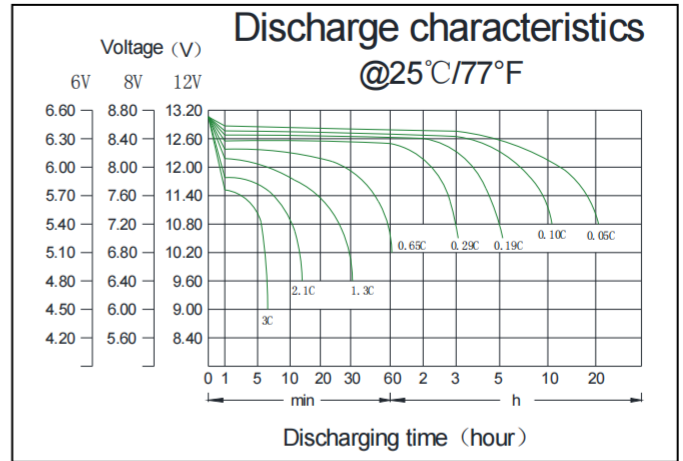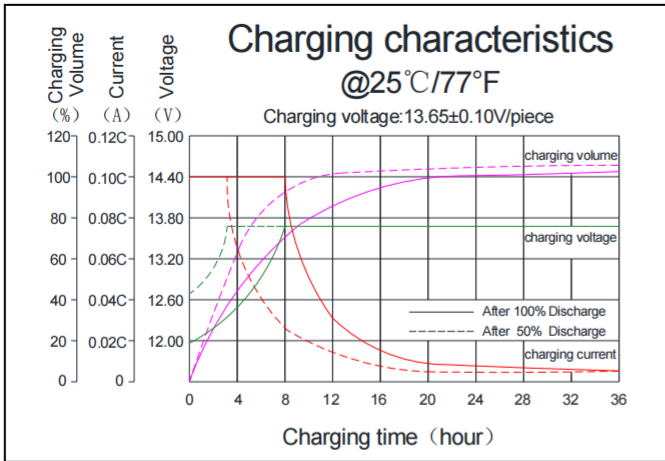

### Battery Discharge Capacity

Long time discharge capacity for Offer Grid solar/wind application						
Capacity	C20(Ah)	C48(Ah)	C72(Ah)	C100(Ah)	C120(Ah)	C240(Ah)
Model	F.V=1.75VPC					
<b>HDC6-225</b>	225.00	231.00	237.00	222.00	249.53	256.05

Add: Building Evolution, Xingdong industry Park, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China.

Tel: +86-755-29123661 Email: Sales@CSBattery.cn, Support@CSBattery.cn

Website: www.CSBattery.cn